

# Natural Gas Generator set data sheet (01-01-2018)

Prime 300kWe, Natural Gas



<b>Gas Generator Set Model:</b>	TPI375G	<b>Gas Engine Model:</b>	PSI D219L	<b>Alternator Model:</b>	Leroy Somer LSA 47.2S4
---------------------------------	---------	--------------------------	-----------	--------------------------	------------------------

<b>50Hz</b> 1500 r.p.m	<b>3 Phase</b> 4 Wires	<b>Power Factor:</b> Cos $\phi$ = 0.8	<b>Emissions Standard</b>	N/A
---------------------------	---------------------------	--	---------------------------	-----

RATINGS <sup>2)</sup>	Prime Power (PRP)		Continuous Power (COP)		Rated Current	Thermal Output	Efficiency	
	kW	kVA	kW	kVA			Electrical	Thermal <sup>3)</sup>
<b>Voltage (V)</b>	kW	kVA	kW	kVA	Amps	kW	$\eta$ (%)	
380/220	300	375	N/A	N/A	569.8	355	38.0%	45.0%
<b>400/230</b>	<b>300</b>	<b>375</b>	<b>N/A</b>	<b>N/A</b>	<b>541.3</b>	<b>355</b>		
415/240	300	375	N/A	N/A	521.7	355		
440/254	300	375	N/A	N/A	492.1	355		

### Conditions and Defintions:

- 1) COP are applicable for supplying continuous electrical power for full load operations, there is no overload available.
- 2) Engine output data under ISO8528/1, ISO3046/1, BS5541/1, DIN6271 conditions.

## Genset General Specifications

Gas Genset model	TPI375G	Electrical efficiency	38.0%
Gas Engine model	D219L	Thermal efficiency	45.0%
Electrical output (kW/kVA)	300/375	Total efficiency	83.0%
Fuel	Natural gas	Speed regulating rate	0-5% Adjustable
Frequency (HZ)	50	Dimension (lengthxwidthxheight) (mm)	3200x1400x1820
Speed (rpm)	1500	Net Weight (kg)	3400

## Engine Specifications

Manufacturer	PSI
Model	D219L
Mechanical power	340 kWm
Speed	1500 rpm
Configuration / number of cylinders	V-type / 12
Bore / Stroke	128/142 mm
Displacement	21.9 L
Compression ratio	10.5:1
Firing Order	1-12-5-8-3-10-6-7-2-11-4-9
Direction of rotation	Counter clockwise from flywheel
Speed Governor	Electronic
Ignition system	Altronic
Spark plug	NGK
Induction system	Turbo charge air cooled
Combustion type	Spark ignition
Cooling mode	Radiator

### Cooling system

Coolant capacity (engine only)	52.3 Litres
Total coolant capacity (engine with radiator)	228 Litres
Engine coolant flow	550 liters/min
Standard thermostat range	71-85 °C
Maximum allowable top tank temperature	104-110 °C

### Lubrication system

Engine oil capacity (min-max)	33-40 Litres
Oil filter capacity	7.1 Litres
Oil consumption	≤1.0 g/kW.h
Maximum allowable oil temperature	121 °C
Oil grade	API CD/CF or higher, SAE 15W-40

### Exhaust system

Maximum allowable back pressure	10.2 kPa
Exhaust flow at rated power	68.7 m <sup>3</sup> /min
Maximum turbine inlet temperature	750°C

### Air induction system

Maximum allowable Intake Air Restriction with Air Cleaner	
- Clean	1.24 kPa
- Dirty	3.74 kPa
Combustion air required (entire engine)	22 m <sup>3</sup> /min

### Fuel system

Maximum EPR rated pressure	6.9 kPa
Minimum running pressure to EPR	1.7 kPa
Minimum gas supply pipe size	2 x 2" NPT
Lower calorific value	34.71 MJ/Nm <sup>3</sup>
Gas consumption at 100% standby	117.7 Nm <sup>3</sup> /h
Gas consumption at 100% load	107.0 Nm <sup>3</sup> /h
Gas consumption at 75% load	80.3 Nm <sup>3</sup> /h
Gas consumption at 50% load	53.5 Nm <sup>3</sup> /h
Gas consumption at 25% load	26.8 Nm <sup>3</sup> /h

### Electrical system

Charging generator	24V x 45A alternator
Starting motor	24V x 7kW
Battery voltage	24V
Ignition controller	12 or 24V DC

### Thermal Data

Heat rejected to cooling water at rated Load	21.5 kW
Heat rejection per CAC	TBD

## Alternator Specifications

**50HZ/1500R.P.M**

Manufacture / Brand	Leroy-Somer
Model	LSA 47.2S4
AVR model	R250
Coupling / Bearing	Direct /Single bearing
Phase	3 Phase
Power factor	Cos $\phi$ = 0.8
Winding pitch - code	2/3 - (wdg6)
Drip proof	IP 23
Excitation	Shunt

Prime output power	328kW/410kVA
Insulation class	H
Voltage regulation	± 0,5 %
Totale harmonic distortion THD no load <1.5% - on load <2%	
Number of wires	12 (N° 6) / 6 (N° 6S)
Wave form : NEMA = TIF - (*)	< 50
Altitude	≤ 1000 m
Overspeed	2250 min <sup>-1</sup>
Air flow	0.9 m <sup>3</sup> /s

## Control Panel

---



- Deep sea DSE7320 controller
  - Digital control panel
  - Volts, current, frequency, rpm (instruments)
  - Genset running hours
  - Battery voltage and charging
  - Over speed pre-alarm & shutdown
  - High water temp. pre-alarm & shutdown
  - Low oil pressure pre-alarm & shutdown
  - Low voltage pre-alarm & shutdown
  - Overcurrent pre-alarm & shutdown
- 

## Standard Features

---

- High efficient water cooled gas engine with radiator
- Brushless alternators (Class H, with AVR.)
- Heavy duty rubber anti-vibration mountings
- Starter batteries and connecting cables
- Separate engine-drive battery charging alternator
- Industrial silencer for open type generator sets
- Circuit breaker - 3 pole (MCCB)
- Maintenance free battery
- Low coolant level sensor
- Oil filter - Air filter
- Fully welded steel baseframe
- Ignition system
- Gas train: ball valve, gas filter, gas pressure regulator, pressure gauge, electromagnetic valve;
- Wiring with IEC standard
- Factory test certificate
- Operation & Maintenance manual & Diagrams
- Worldwide product / Technical support


## Optional

---

- Automatic Transfer Switch (ATS)
- Canopy/Enclosure
- Water heater for severe cold weather
- Lub-oil heater for severe cold weather
- Silent containerised
- Residential silencer
- Panel for auto synchronization with Mains
- Extra air filters for time-maintenance
- Automatic oil supply system
- Extra oil filters for time-maintenance
- Parallel cabinet
- Full range of attachments and options available for alternator
- Flame arrestor in gas train
- Desulfurization system
- Gas pretreatment system
- Dehydration system
- Genset Commissioning / Testing on site

## Combined Heat and Power Systems

---

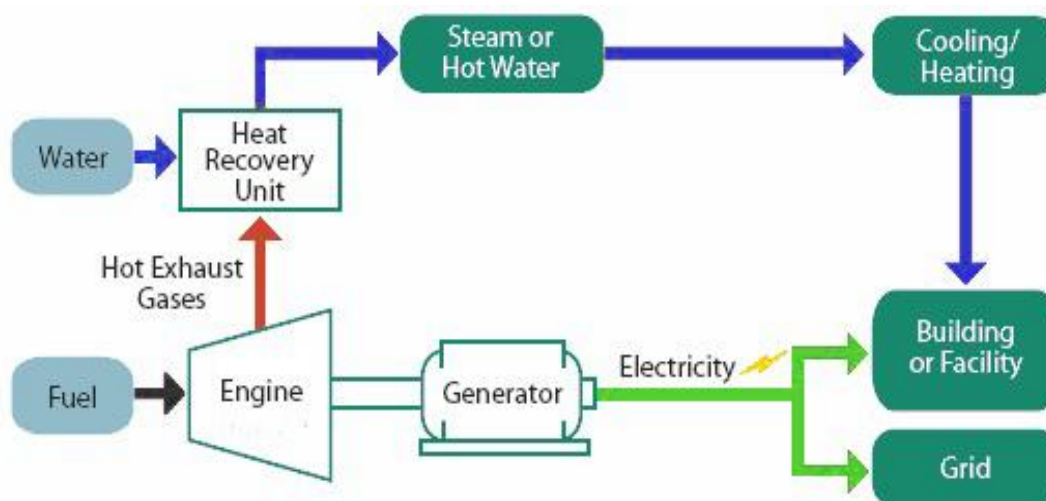

We offer Combined Cooling Heating and Power (CHP and CCHP) packages for our gas generator sets. It can recover 75%-90% combined electrical and thermal efficiency, resulting in major reductions in your overall energy costs. In the past years we have supplied CHP systems to Germany, Russia, Indonesia etc. We have the experience and capabilities to meet your total energy requirements.

## Warranty

---

The goods of Tide Power Technology are under warranty against defects in materials and workmanship for period 1 year or 2000 hours operation time whichever come first from the date of delivery to the end user (except the damageable spare parts of genset caused by incorrect man-made operation), and that the aforementioned warranty for the same token is back up by the engine (8750 hours for continuous duty which should not exceed 75% of the prime power rating) & alternator manufactures and their global distributors.